

**The Aimetis A10D Thin Client™** is a secure, reliable and cost-effective PC alternative designed to easily display 1080p video from 30+ network video manufacturers. It's the perfect solution for users who need more functionality than a traditional decoder but less complexity and maintenance than a PC solution. The device is ideal in space constrained environments such as small footprint retail due to its easy setup, compact design and flexible installation options.



#### Key Features:

- Decode 1080p video from 30+ network video manufacturers
- Small fanless form factor
- VESA, wall or desktop mount options
- PoE powered
- Kensington lock

#### Control Options:

- Mouse control
- Web
- iPhone, iPad
- Android

#### Open


Supports over 30 network camera manufacturers at 1080p while leveraging IT and security industry standards. This allows the device to be easily installed as a complementary product to existing deployments as well as an addition on a new project.

#### Simple

Easy installation in less than five minutes with the capability to connect to iPhone & Android apps for remote control of cameras and multiple screen layouts in an intuitive user interface.

#### Lower Total Cost of Ownership

Highly secure, simplified IT management and reduced end user training due to its intuitive user interface add up to big savings. As a fanless, PoE powered product, the A10D draws ninety-five percent less energy than a Windows PC, delivering the performance users need at a fraction of the cost.


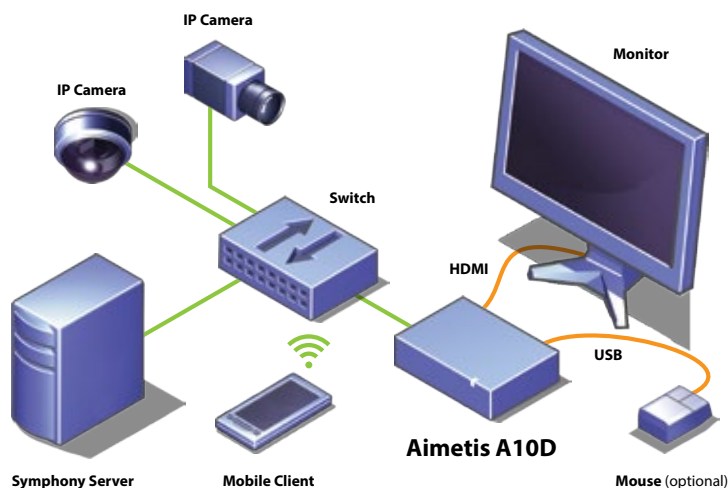


## Hardware Specifications

Operating System	Linux
Video Output	1 x HDMI (1080p)
Camera Resolution	All Resolutions up to 1920 x 1080
Camera Frame Rate	60 fps at 1920 x 1080 120 fps at 800 x 450
Video Compression	H.264, MPEG-4, Motion JPEG
Simultaneous Views	1, 4, 9
USB 2.0 Port	2
Ethernet	1 x Gigabit
Security	Password Protection
Network Protocols	TCP, UDP, IP, HTTP, RTSP, ICMP, ARP, DHCP, DNS
Operating Temp.	0 - 45°C
Storage Temp.	- 20 - 45°C
Dimensions (mm)	175W x 120D x 35H
Weight	600 g
Power	Power over Ethernet IEEE 802.3af Class 3, max. 8.5 W
Compliance	CE, FCC, RoHs
Mounting Kit	Wall, VESA (sold separately)
Included Accessories	1 HDMI cable, Installation Guide
Warranty	2 year
Ordering Information	AIM-A10D

Note: In order to connect to the A10D, two items must be downloaded, an application for your smartphone or tablet and a server component called the Mobile Bridge.

## Dimensions

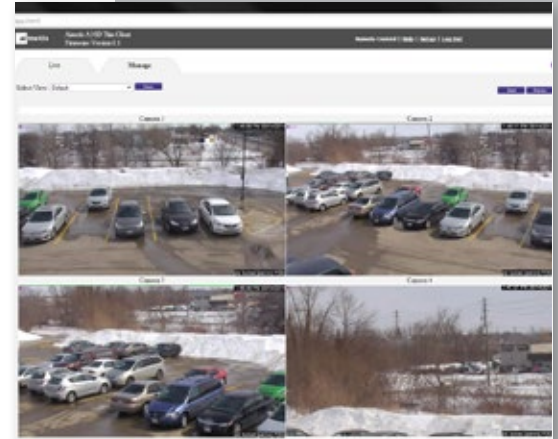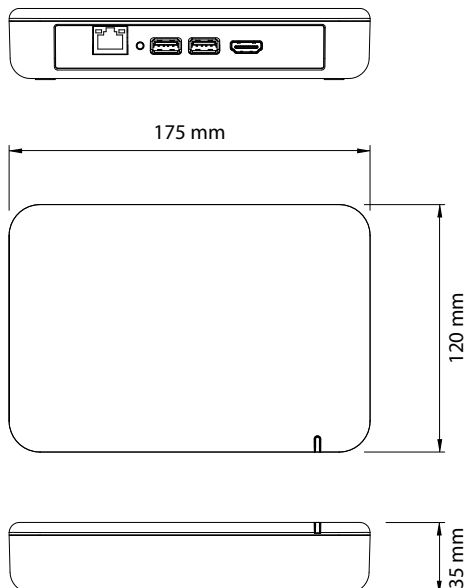

## Compatible Brands



& More

© 2014 Aimetis Corp. Aimetis and Aimetis Symphony are registered trademarks or trademark applications of Aimetis Corp. in various jurisdictions. All other company names and products are trademarks or registered trademarks of their respective companies. We reserve the right to introduce modifications without notice.

## Aimetis Corporation

500 Weber Street North  
Waterloo, Ontario  
Canada N2L 4E9  
+1 519 746-8888  
info@aimetis.com



## Aimetis GmbH

Am Prime Parc 7  
65479 Raunheim  
Germany  
+49 (0) 6142 207 98 60  
info@aimetis.de

